



Description


The MK2745-20 is a low cost, low jitter, high performance clock synthesizer for DVD and other MPEG 2 based applications. Using analog Phase-Locked Loop (PLL) techniques, the device accepts a 27.00 MHz fundamental mode crystal or clock input to produce multiple output clocks including a selectable processor clock, a selectable processor clock, a selectable audio clock, and fixed outputs of 27 MHz and 24.576 MHz. The audio clocks are frequency locked to the 27.00MHz input using our patented zero ppm error techniques, allowing audio and video to track exactly, thereby eliminating the need for large buffer memory.

MicroClock manufactures the largest variety of DVD, Set-Top Box, and multimedia clock synthesizers for all applications. Consult us to eliminate crystals and oscillators from your board.

Features

- Packaged in 16 pin narrow (150 mil) SOIC 
- Ideal for DVD and MPEG solutions
- 3.0 V to 5.5 V operating voltage
- Patented zero ppm audio clock error for 256X and 384X sampling rates
- Selectable audio sampling frequencies support 32 kHz, 44.1 kHz, and 48 kHz in most DACs
- 27.00 MHz fundamental crystal or clock input
- Eight selectable processor frequencies
- Fixed clocks of 27 and 24.576 MHz
- Zero ppm error in all clocks
- Full CMOS outputs with 25mA output drive capability at TTL levels
- Advanced, low power, sub-micron CMOS process
- 3.0V to 5.5V operating voltage
- See also the MK2712 for NTSC/PAL clocks

Block Diagram

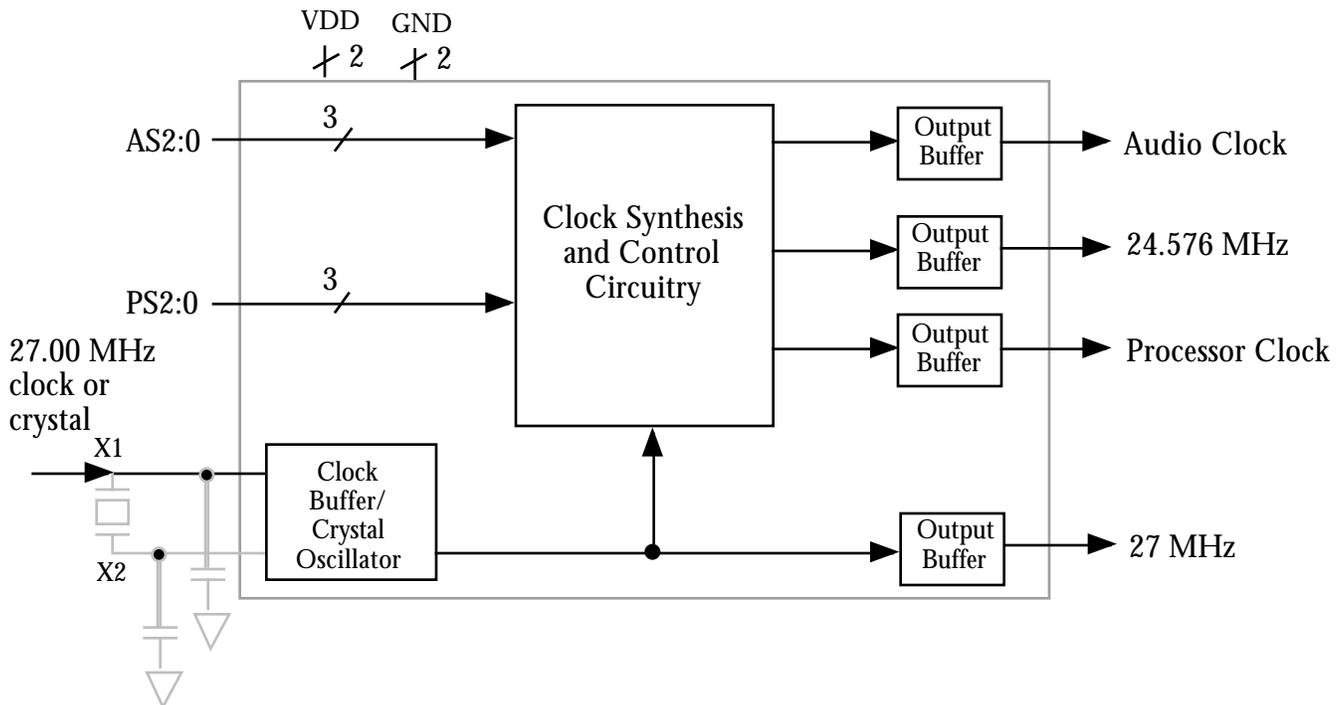

**Electrical Specifications**

Parameter	Conditions	Minimum	Typical	Maximum	Units
ABSOLUTE MAXIMUM RATINGS (note 1)					
Supply voltage, VDD	Referenced to GND			7	V
Inputs and Clock Outputs	Referenced to GND	-0.5		VDD+0.5	V
Ambient Operating Temperature		0		70	°C
Soldering Temperature	Max of 20 seconds			260	°C
Storage temperature		-65		150	°C
DC CHARACTERISTICS (VDD = 5.0V unless noted)					
Operating Voltage, VDD		3		5.5	V
Input High Voltage, VIH, X1/ICLK pin only		VDD/2 + 1	VDD/2		V
Input Low Voltage, VIL, X1/ICLK pin only			VDD/2	VDD/2 - 1	V
Input High Voltage, VIH		2			V
Input Low Voltage, VIL				0.8	V
Output High Voltage, VOH	IOH=-25mA	2.4			V
Output Low Voltage, VOL	IOL=25mA			0.4	V
Output High Voltage, VOH, CMOS level	IOH=-8mA	VDD-0.4			V
Operating Supply Current, IDD	No Load, note 2		37		mA
Short Circuit Current	Each output		±100		mA
Input Capacitance			7		pF
AC CHARACTERISTICS (VDD = 5.0V unless noted)					
Input Frequency			27.000		MHz
Output Clock Rise Time	0.8 to 2.0V			1.5	ns
Output Clock Fall Time	2.0 to 0.8V			1.5	ns
Output Clock Duty Cycle	At VDD/2	40		60	%
Frequency error, all clocks			0	1	ppm
Absolute Jitter, short term	Variation from mean		350		ps

- Notes: 1. Stresses beyond those listed under Absolute Maximum Ratings could cause permanent damage to the device. Prolonged exposure to levels above the operating limits but below the Absolute Maximums may affect device reliability.
2. With Processor clock at 50MHz, and ACLK at 16.93MHz.


External Components

The MK2745-20 requires a minimum number of external components for proper operation. Decoupling capacitors of 0.01μF should be connected between VDD and GND, as close to the MK2745-20 as possible. A series termination resistor of 33 Ω may be used for each clock output. If a clock input is not used, the 27.00 MHz crystal must be connected as close to the chip as possible. The crystal should be a fundamental mode (do not use third overtone), parallel resonant, 50ppm or better. Crystal capacitors should be connected from pins X1 to ground and X2 to ground. The value of these capacitors is given by the following equation, where C_L is the crystal load capacitance: Crystal caps (pF) = $(C_L - 6) \times 2$. So for a crystal with 16pF load capacitance, two 20pF caps should be used.



Package Outline and Package Dimensions

16 pin SOIC narrow

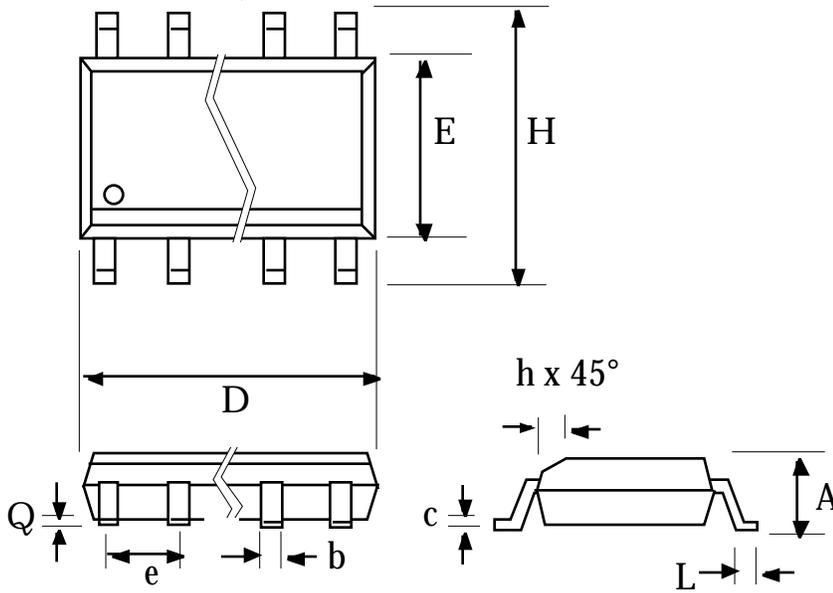

Symbol	Inches		Millimeters	
	Min	Max	Min	Max
A	0.055	0.070	1.397	1.778
b	0.013	0.019	0.330	0.483
c	0.007	0.010	0.191	0.254
D	0.385	0.400	9.779	10.160
E	0.150	0.160	3.810	4.064
H	0.225	0.245	5.715	6.223
e	.050 BSC		1.27 BSC	
h		0.016		0.406
L	0.016	0.035	0.406	0.889
Q	0.004	0.01	0.102	0.254

Ordering Information

Part/Order Number	Marking	Shipping packaging	Package	Temperature
MK2745-20S	MK2745-20S	tubes	16 pin narrow SOIC	0-70°C
MK2745-20STR	MK2745-20S	tape and reel	16 pin narrow SOIC	0-70°C

CHANGE HISTORY

Version	Date first published	Status	Comments
A	5/24/99	Preliminary	Original

While the information presented herein has been checked for both accuracy and reliability, Integrated Circuit Systems, Incorporated (ICS) assumes no responsibility for either its use or for the infringement of any patents or other rights of third parties, which would result from its use. No other circuits, patents, or licenses are implied. This product is intended for use in normal commercial applications. Any other applications such as those requiring extended temperature range, high reliability, or other extraordinary environmental requirements are not recommended without additional processing by ICS. ICS reserves the right to change any circuitry or specifications without notice. ICS does not authorize or warrant any ICS product for use in life support devices or critical medical instruments.